



# Standard UHF RFID Re-useable Tag Spec Sheet


Eriginate Corporation  
1400 Madison Ave Suite 504  
Mankato, MN 56001, USA

WWW.ERIGINATE.COM

Work Phone: 507-344-8005



*This is a dangle style Cattle/Dairy tag that is made of highly supple polyurethane for high retention and long life.*

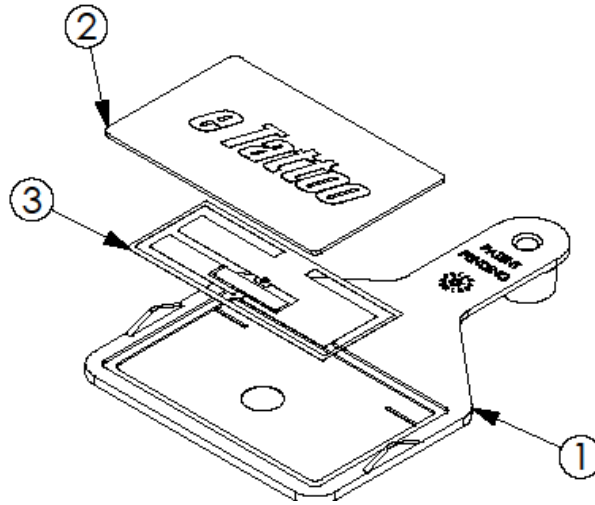

### Standard Re-useable eTattoo™ Specifications

Temperature Range	-35 to 38 Centigrade
Frequency Range	866-928 MHz
Read distance with Sirit 4100 (US Part 15 power) fixed reader	15 to 25 feet
Read distance with Motorola MC 9090-G	Up to 15 feet
Electronic chip	NXP-G2XM
Tag Applicator	Universal
Size	7.62 X 11.43 centimeters
Weight	15.6 Grams
Color	Titanium White
Optical numbering	Ink/Laser writeable
Outside tag material	TPU Polyurethane
Compatibility	ISO 18000-6C/EPC global Gen 2 UHF
Hole size	5 millimeters
Attachment design	Re-useable/open ended
Encoding	User defined